

TSB#: EL-0001

Release Date: February 12, 2013

TECHNICAL SERVICE BULLETIN

VEHICLE DESCRIPTION:

2013 F250/350, 6.2L A/T – BI-FUEL CONVERSION SYSTEMS ONLY.

ISSUE:


THE PCV ELECTRICAL CONNECTOR INTERFERES WITH THE CNG FUEL RAIL ON BI-FUEL CONVERSIONS.

DTC'S (DIAGNOSTIC TROUBLE CODES):

NONE.

CORRECTIVE ACTION:

REPLACE THE PCV VALVE AS OUTLINED IN THE SERVICE PROCEDURE.

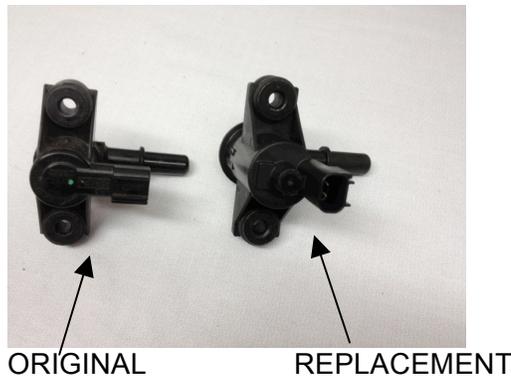

SERVICE PROCEDURE:

NOTE: THE REQUIRED PCV VALVE IS NOW INCLUDED WITH EACH KIT.

REMOVE PCV VALVE AND REPLACE WITH SUPPLIED COMPONENT.

REQUIRED PARTS:

Part Number	Description	Quantity
9U5Z-9C915-BE	PCV Valve	1